



## Wrap Reel Electronic K086

To produce skeins of yarn of a pre-determined length and number of turns for count and / or strength testing.

**Standards : ASTM D2260 ,  
ASTM D1907 ,  
ISO 2060**



### TECHNICAL DATA :

- Reel girth : 1000mm±1mm
- Reeling circle : 1-9999
- Reel speed : 30 r/min -300 r/min
- Guide bar travel : 35mm
- Dimensions : 780X710X500mm
- Weight : 60kg
- Power : AC220V , 50Hz

### HONGKONG

**KMS** COLORTECH SERVICE CO., LTD.

2005 Metro Centre II , 21 Lam Hing Street, Kowloon Bay, Hong Kong.

TEL: (852) 2753 6176 FAX: (852) 2753 6049

### CHINA

GUANGZHOU TEL: (86-20) 3473 0153 FAX: (86-20) 3473 0152 MOBILE: (86) 18675899688


E-MAIL: [sales@kmscolor.com](mailto:sales@kmscolor.com) / [kmsgz@vip.163.com](mailto:kmsgz@vip.163.com)

WEBSITE: [www.kmscolor.com](http://www.kmscolor.com)

## Twist Tester Electronic K331

To determine yarn twist in single or Plyed yarns, quadrant type with auto stop & reverse for conventional or untwist / retwist methods.

**Standards : ASTM D1422 ,  
ASTM D1423 ,  
ISO 2061**

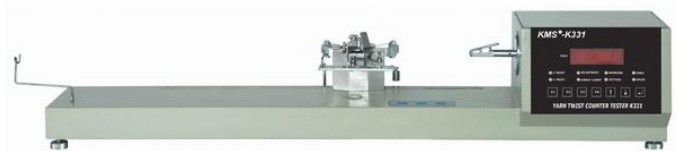

### TECHNICAL DATA :

- Testing length : 25mm-500mm
- Testing range(twist) : 0.1-9999.9
- Rotating speed : 500r/min-2000r/min
- Dimensions : 960X140X310mm
- Weight : 30kg
- Power : AC220V , 50HZ