




# Water Sprayer System ES 布面加湿系统

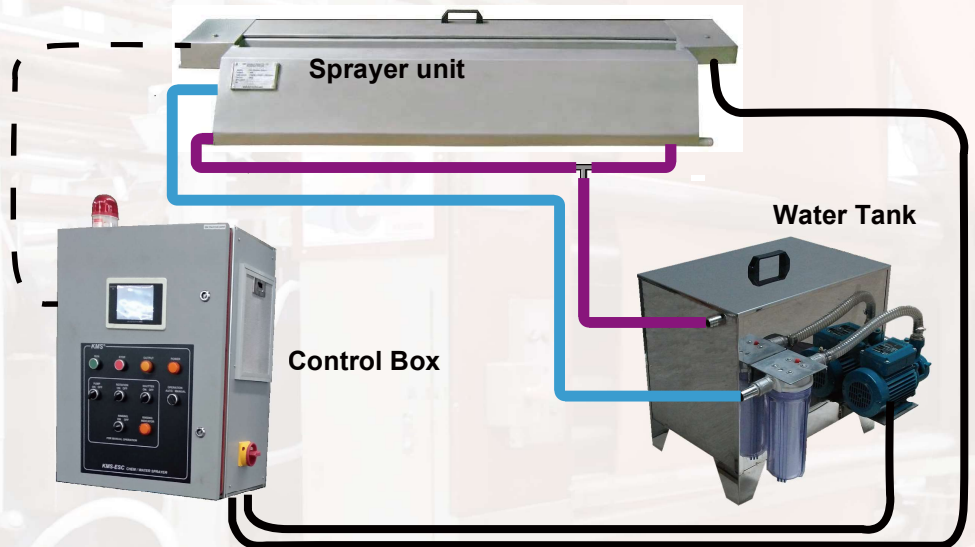

Model:ES-S  
Single water sprayer


Model:ES-T  
Double-side water sprayer

## Advantages

- Improved fabric quality.
- Optimised of residual moisture on fabric
- Reduction of energy cost.
- Improve shrinkage.


## Highlights

- Provided different working width of single or double Ecosprayer unit.
- Auto-synchronize the machine speed of spraying water amount.
- Wide range of water spray amount.
- Color monitor controller with trend curve display.

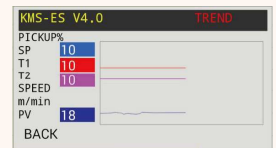

## Specification :

ES-S / ES-T

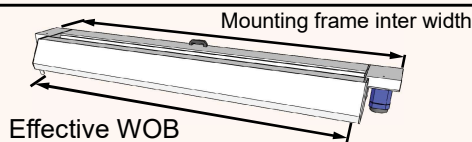

<b>Model series</b> (existing mc width model, *tailor-make on request.)	1200	1380	1600	1800	2000	2400	3000
<b>Effective WOB max. mm</b>	1150	1250	1500	1750	1950	2200	2800
<b>Mounting frame inter width</b>	1593	1681	1981	2181	2381	2781	3391
<b>Sprayer dimension mm</b>	machine width×300(H)×500(D)						
<b>Voltage</b>	AC380V 3/Phase 60Hz						
<b>Wattage</b>	1800W / 3300W						
<b>Water tank dimension mm</b>	500×500×550mm						
<b>Net weight kg</b>	47kg (Single sprayer)						

## Application

- **Stenter frame machine** - Install at the out outlet end of obtain fabric with optimum moisture content and better fabric handling.
- **Compacting machine** - Install at the feed end of compacting machine to ensure the constant humidity and consistent result, ie, shrinkage.
- **Festoon steamer** - Install the festoon steamer inlet, spraying the printed and unprinted side to improve dyes fixation, high color field and uniformity.
- **Inspection machine** - Knitted goods are often sold by weight, addition of moisture over the fabric web to obtain optimum weight of the fabric.

## Contact us



13302233344  
18675899688



12158666  
178864880



sales@kmscolor.com



www.kmscolor.com

Agent :



Alibaba

KMS致力各种测试标准



kmscolor.com

\*Subject to continuous product development, specifications change without prior notice

\*因应产品持续开发中, 参数规格更新恕不另行通知

Copyright by KMS Colortech Service Co.,Ltd