




Water Sprayer System

ES 布面加湿系统

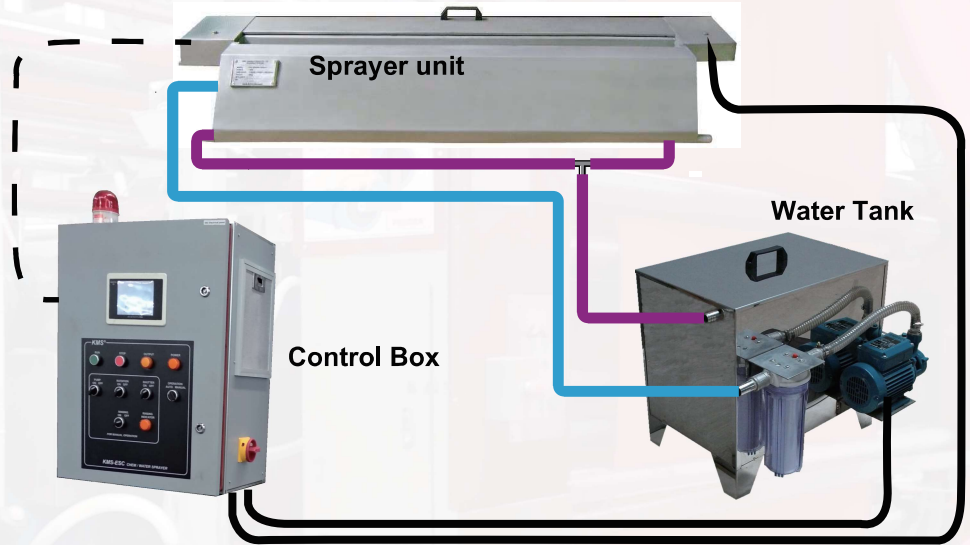

Model:ES-S
Single water sprayer

Model:ES-T
Double-side water sprayer

Advantages

- Improved fabric quality.
- Optimised of residual moisture on fabric
- Reduction of energy cost.
- Improve shrinkage.

Specification :	ES-S / ES-T				
Model series (existing mc width model, *tailor-make on request.)	1200	1600	2000	2400	3000
Fabric WOB mm	1060	1400	1800	2200	2800
Machine width mm	1600	1980	2380	2780	3380
Sprayer dimension mm	machine width×300(H)×500(D)				
Voltage	AC380V 3/Phase 60Hz				
Wattage	1800W / 3300W				
Water tank dimension mm	800×500×470mm				
Net weight kg	47kg (Single sprayer)				

Highlights

- Provided different working width of single or double Ecosprayer unit.
- Auto-synchronize the machine speed of spraying water amount.
- Wide range of water spray amount.
- Color monitor controller with trend curve display.



Application

- **Stenter frame machine** - Install at the out outlet end of obtain fabric with optimum moisture content and better fabric handling.
- **Compacting machine** - Install at the feed end of compacting machine to ensure the constant humidity and consistent result, ie, shrinkage.
- **Festoon steamer** - Install the festoon steamer inlet, spraying the printed and unprinted side to improve dyes fixation, high color field and uniformity.
- **Inspection machine** - Knitted goods are often sold by weight, addition of moisture over the fabric web to obtain optimum weight of the fabric.

Contact us

13302233344
18675899688

12158666
178864880

sales@kmscolor.com
www.kmscolor.com

Agent :



Alibaba

KMS致力各种测试标准



kmscolor.com