




Chemical Sprayer System ESC 布面喷药系统

Model:ESC-S
Single chemical sprayer

Model:ESC-T
Double-side chemical sprayer

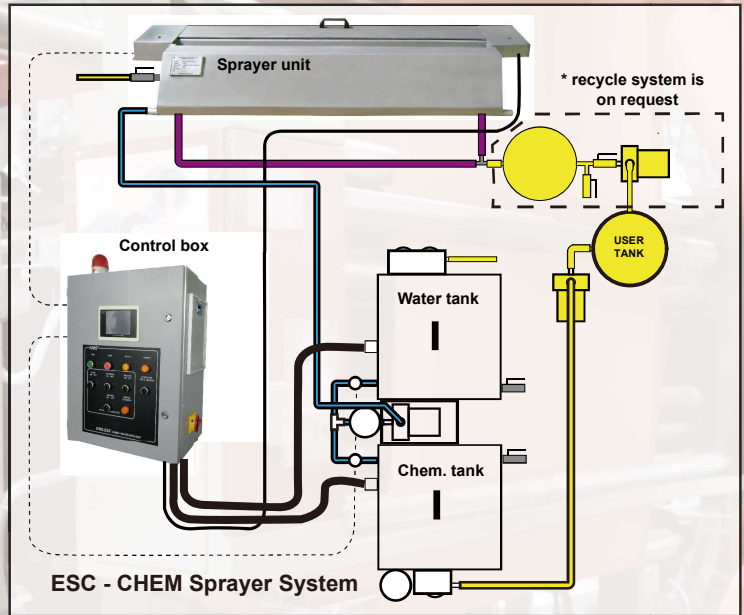


Advantages

- Improved fabric quality.
- Reduction of drying energy cost, water and chemical consumption.
- Reduce wet migration of printing.

Specification :


ESC-S / ESC-T

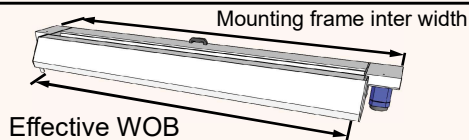

Model series (existing mc width model, *tailor-make on request.)	1200	1380	1600	1800	2000	2400	3000
Effective WOB max. mm	1150	1250	1500	1750	1950	2200	2800
Mounting frame inter width	1593	1681	1981	2181	2381	2781	3391
Sprayer dimension mm	machine width×300(H)×500(D)						
Sprayer Power	AC380V 3/Phase 60Hz , 1800W / 3300W						
Water & Chemical tank dimension mm	500×500×550mm						
Water tank Power	9KW / 18KW						
Net weight kg	47kg (Single sprayer)						

Highlights

- Provided different working width of single or double Ecosprayer unit.
- Auto-synchronize the machine speed of spraying water amount.
- Wide range of water spray amount.
- Color monitor controller with trend curve display.
- Auto-rinsing nozzle software and system.

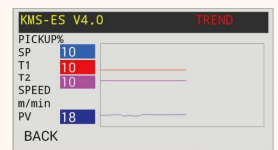

Application

- **Compacting machine** - Install at the feed end of compacting machine to apply chemical.
- **Festoon steamer** - Install the festoon steamer inlet, spraying the printed and unprinted side to improve dyes fixation, high color field and uniformity.
- Spray ESC chemical and dry before print.

Contact us



13302233344
18675899688



12158666
178864880



sales@kmscolor.com



www.kmscolor.com

Agent :



Alibaba

KMS致力各种测试标准



kmscolor.com

*Subject to continuous product development, specifications change without prior notice

*因应产品持续开发中, 参数规格更新恕不另行通知

Copyright by KMS Colortech Service Co.,Ltd