




Chemical Sprayer System

ESC 布面喷药系统

Model:ESC-S
Single chemical sprayer

Model:ESC-T
Double-side chemical sprayer

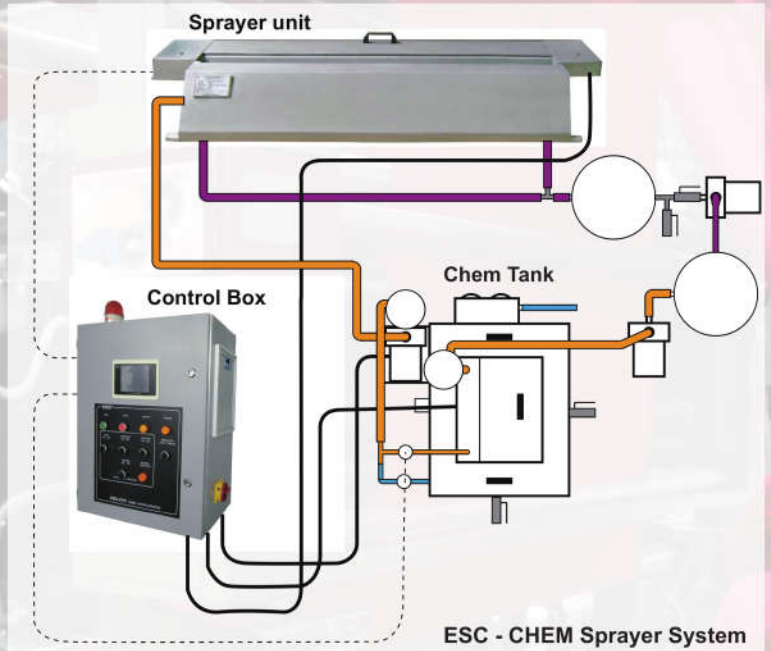

Advantages

- Improved fabric quality.
- Reduction of drying energy cost, water and chemical consumption.
- Reduce wet migration of printing.


Highlights

- Provided different working width of single or double Ecosprayer unit.
- Auto-synchronize the machine speed of spraying water amount.
- Wide range of water spray amount.
- Color monitor controller with trend curve display.
- Auto-rinsing nozzle software and system.



Specification :

ESC-S / ESC-T

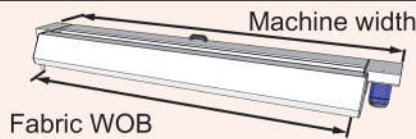

Model series (existing mc width model, *tailor-make on request.)	1200	1600	2000	2400	3000
Fabric WOB mm	1060	1400	1800	2200	2800
Machine width mm	1600	1980	2380	2780	3380
Sprayer dimension mm	machine width×300(H)×500(D)				
Sprayer Power	AC380V 3/Phase 60Hz , 1800W / 3300W				
Water tank Power	9KW / 18KW				
Water tank dimension mm	1000×800×550mm				
Net weight kg	47kg (Single sprayer)				

Application

- **Compacting machine** - Install at the feed end of compacting machine to apply chemical.
- **Festoon steamer** - Install the festoon steamer inlet, spraying the printed and unprinted side to improve dyes fixation, high color field and uniformity.
- Spray ESC chemical and dry before print.

Contact us



13302233344
18675899688



12158666
178864880



sales@kmscolor.com



www.kmscolor.com

Agent :



Alibaba

KMS致力各种测试标准



kmscolor.com

*Subject to continuous product development, specifications change without prior notice

*因应产品持续开发中, 参数规格更新恕不另行通知

Copyright by KMS Colortech Service Co.,Ltd