




Universal Tensile Strength Tester UST-PC

UST- PC强力测试仪

Model:
UST-PC



Application

- To determine textile yarn, woven fabric, knitted / elastic fabric etc, on break force, cycle test, stretch recovery, seam slippage and elongation test.
- PC computer type.

Highlights

- Machine selling in a package form:
 - PC with build-in software and interface cable.
 - Default international and enterprise textile testing standards installed in software with simple recall process.
- *Provide new test standard build in the software on request.
- Setup and operation video accompanied with instrument delivery.
- Break force , % elongation, Cycle test , stretch & recovery, seam slippage , and multi-test function available.
- Various testing curves and data statistic provided , stored and print.
- Set force and Set distance test function allowed in software.
- Choose different force unit (gf, kgf, cN, N or lbf), data storage, data recall and printing function provided.

UST provide daily and weekly self-check method



- SDC VF verification fabric and reference data for self-check.
- The self-check method can also identify consumable parts replacement.

Standard Compliance

Default

ASTM **D5034, D5035, D2256, D4964, D434, D6614, D3822, D4632, D885, D3107, D2261, D3787** ISO **2062, 13934-2, 6939, 13935-1/2, 13936-1/2, 13937-2, 1421,2, 13539-1/2, 13934-1, 13935-2, 3376, 4674, M&S P11, P12, P14, P15**, set force, set distance, LTD **03,11,19**, JIS **L1096 Method1.2**, BS **14704-1, 4952, 3320, DIN53868, VSS03**



Pneumatic grip



Yarn grip



Knob grip



Elastic grip



Ball bursting grip

SDC Verification Fabric Self-check



SDC VF Verification fabric



SDC VF Certificate




CE EU Certificate

*Subject to continuous product development, specifications change without prior notice
*因应产品持续开发中，参数规格更新恕不另行通知

Specification :	UST- PC		
Measurement range	5~250kg (depend on choose)		
Loadcell type	5kgf	50kgf	250kgf
Data accuracy	0.01gf	0.0001kgf	0.001kgf
Loadcell option (2 auto reconized pos.)	Choose:5kgf, 10kgf, 25kgf, 50kgf, 100kgf, 250kgf		
Adjustable grip distance	10~500mm		
Adjustable grip speed	1~500mm/min		
Voltage	500W, 220V, 50/60Hz		
Dimension mm	660 × 630 × 1520		
Net weight kg	100kg		

Consumable and Accessories

- SDC VF2955 校正布, 每包1米
SDC VF2955 Verification Fabric PH 1m/pack(pt320004)
- 5kgf, 10kgf, 25kgf, 50kgf, 100kgf, 250kgf 负重传感器
5kgf, 10kgf, 25kgf, 50kgf, 100kgf, 250kgf load cell (pt310180)
- 气动夹具 (上/下) 1对
Pneumatic grip(up&bottom) 1set (pt101008)
- 手动夹具 (上/下) 1对
Mechanical grip (up&bottom) 1set (pt110091)
- 单纱夹具 (上/下) 1对
Single yarn grip(up&bottom) 1set (pt100397)
- 1"夹片 4片/1套
1" grab test plate 4pcs/pack (pt101055)
- 平夹片 4片/1套
Flat plate 4pcs/pack (PT100511)
- 弹性夹片 4片/1套
Elastic grip plate 4pcs/pack (pt101053-B)
- 手动绞纱线样版架 2件/1套
Skein yarn grip 2pcs/pack (pt100398)
- 弓形夹片 2件/1套
Loop test grip 2pcs/pack (pt101060)
- 刺针夹具 1件
Standard Prong grip 1pcs (pt320019)
* 需配合气动夹具或手动夹具一起使用
- 纱线夹胶片 4片/1套
Yarn grip rubber ring 4pcs/pack (pt101054)
- KMS 平夹胶片 6片/盒
Rubber plate 6pcs/pack (pt102227)
*用于1" 夹片和平片更换胶片用

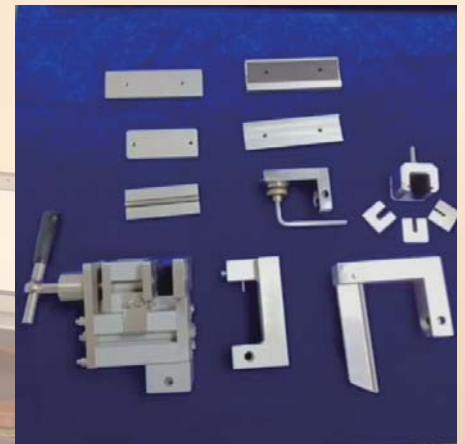

Contact us

☎ 13302233344
18675899688

🐧 12158666
178864880

@ sales@kmscolor.com

🌐 www.kmscolor.com

Agent :



Alibaba

KMS致力各种测试标准



Demo